



BEST AVAILABLE COPY



PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

1016-113-WU

PCT/GB 2004 / 003427



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECD 22 OCT 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 29 September 2004

Patents Form 1/77

Patents Act 1977
(Rule 18)06AUG03 EB28076-1 C43002
P01/7700 0.00-0318380.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

THE PATENT OFFICE
WM
06 AUG 2003
RECEIVED BY FAX

The Patent Office
Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference HAR.SEN02

2. Patent application number
(The Patent Office will fill in this part)

0318380.3

- 5 AUG 2003

3. Full name, address and postcode of the or of each applicant. *(underline all surnames)*

INTELLIGENT ELECTRICS LIMITED
SUNNY ACRES
BRIDPORT ROAD
WINTERBOURNE STEEPLETON
DORCHESTER
DT2 9DX

8598310002

A BRITISH COMPANY

4. Title of the invention

REMOTE CONTROL

5. Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent
(including the postcode)

PATENTS LIMITED
PROSPECT ASSOCIATES
PROSPECT CENTRE
17b CAMBRIDGE ROAD
WEYMOUTH
DT4 8TJ

Patents ADP number *(if you know it)*

07462781001

7645576002

101

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number.

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer Yes/No)*

YES

a) *any applicant named in part 3 is not an inventor; or*
 b) *there is an inventor who is not named as an applicant; or*
 c) *any named applicant is a corporate body.*
See note (d)

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

5

Claim(s)

3

Abstract

1

Drawing(s)

2 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

1

Translations of priority documents

1

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1 ✓

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents
(please specify)

1

11.

We request the grant of a patent on the basis of this application.

Signature

Date:

6/8/03

12. Name and daytime telephone number of person to contact in the United Kingdom

MICHAEL WHEELER

01305 780565

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 29 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write 'see continuation sheet' in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

REMOTE CONTROL

This invention concerns the remote control of apparatus, especially but not exclusively for reducing power consumed thereby.

5 In our copending patent application GB 0306940.8 we describe a control system which switches apparatus such as heaters and lights on and off automatically in response to ambient temperature or light level or some other natural variable. Further research now shows benefits in controlling such apparatus in relation to the natural variable, rather than simply switching it on
10 and off.

It is an object of the present invention to improve upon the system of GB Patent Application 0306940.8 in this and other respects.

Thus according to the invention there is provided a system for controlling apparatus, which system comprises a sensor responsive to a natural variable
15 having a changing value, a radio transmitter operatively associated with the sensor to transmit a control signal representative of the value of the natural variable, and a radio receiver arranged remote from the transmitter for receiving the control signal, wherein the system includes a controller operable by receipt of the control signal to control the apparatus according to the value of the natural
20 variable.

Preferably the controller is operative to change a parameter of the apparatus as the value of the natural variable changes, eg in proportion thereto.

The parameter may be changed in direct relation to the value of the natural variable. However there are many applications of the present invention in which it is beneficial rather to change the parameter in inverse relation to the value of the natural variable: thus, for instance, output from lamps may be increased automatically as ambient light value falls, or output from heaters may be increased automatically as ambient temperature falls.

Whilst the parameter might be changed continuously, we have found that in practice it is sufficient – and more easily implemented – if the parameter in a plurality of steps.

Also, whilst GB Patent Application 0306940.8 referred to control signals in the 433 MHz band, the present invention is designed for the 868 MHz band.

The invention will now be described by way of example only with reference to the accompanying schematic drawing, in which –

Figure 1 shows a diagrammatic plan view of an office with central heating radiators controlled automatically by means of the invention and

Figure 2 shows a circuit diagram for the control of fluorescent light fittings controlled by means of the invention.

Referring first to Figure 1, this shows a floor of a hotel indicated generally at 110 and comprising a plurality of rooms 112 each provided with a radiator 114 of a central heating system (not otherwise detailed, for simplicity of illustration) whereby the rooms 112 are heated. The hotel 110 has an entrance lobby 116 furnished in the usual way with a reception desk 118. Behind the desk 118, and

- 3 -

therefore out of the way of gulls, is a radio transmitter 120 operatively associated with a temperature sensor 122. The transmitter operates in the 868 MHz band.

Each of the radiators 114 is adjustable by means of an opening and closing valve 114a, in the usual way save that each valve is operated by a 0-10V dc stepper motor 114b. The stepper motors 114b are themselves controlled by radio receivers 114c in communication with the transmitter 120. If there is a fall in the temperature detected by the sensor 122, the transmitter 120 transmits to the receivers 114c a signal representative of the lower temperature, and this causes the stepper motors 114b to turn the radiator valves 114a towards (or further towards) their open position. Similarly, if there is a rise in the temperature detected by the sensor 122, the transmitter 120 transmits to the receivers 114c a signal representative of the higher temperature, and this causes the stepper motors 114b to turn the radiator valves 114a towards (or further towards) their closed position. Thus the heat output of the radiators 114 is varied in inverse relation to the sensed temperature.

The signal from the transmitter 120 may be an analogue representation of the sensed temperature, but in many cases it is sufficient and more convenient for the signal to be a step-wise approximation of the temperature.

Figure 2 illustrates another use of the invention. It shows two remotely controlled fluorescent light fittings indicated in broken lines at 210 and 212. (As indicated in Figure 2, there may be more light fittings similarly controlled). The

- 4 -

two fittings 210 and 212 are of different sizes, fitting 210 comprising a single controllable tube (not detailed) and fitting 212 comprising two individually controllable tubes. The light outputs of the tubes are varied by means of 0-10V dimming ballasts 214 of well known form, which ballasts are operatively connected to radio receivers 216. The light fittings 210 and 212 are powered from live L and neutral N mains supply lines, the live L line including a switch 218 providing overall control.

Provided the switch 218 is closed to complete the live L supply, the light fittings 210 and 212 are remotely controlled as will now be described in more detail. A photometer 220 is arranged, remote from the light fittings 210 and 212, in such a position as to detect ambient light. A radio transmitter 222 communicating with the receivers 216 in the 868 MHz band is connected to the photometer 220 and transmits to the receivers 216 control signals representative of the light level detected by the photometer 220. If there is a fall in the ambient light level as detected by the photometer 220, the transmitter 222 transmits to the receivers 216 a signal representative of the lower light level, and this causes the dimming ballasts 214 to increase the light output from the fittings 210 and 212. Similarly, if there is a rise in the light level detected by the photometer 220, the transmitter 222 transmits to the receivers 216 a signal representative of the higher ambient light level temperature, and this causes the dimming ballasts 214 to decrease the light output from the fittings 210 and 212. Thus the light output of the fittings 210 and 212 is varied in inverse relation to the ambient light level.

- 5 -

The signal from the transmitter 222 may be an analogue representation of the ambient light level, but in practice step-wise adjustment over say 100 or more steps makes adjustment of the light output imperceptible to users.

CLAIMS

- 1 A system for controlling apparatus, which system comprises a sensor responsive to a natural variable having a changing value, a radio transmitter operatively associated with the sensor to transmit a control signal representative of the value of the natural variable, and a radio receiver arranged remote from the transmitter for receiving the control signal, wherein the system includes a controller operable by receipt of the control signal to control the apparatus according to the value of the natural variable.
- 10 2 A system for controlling apparatus as claimed in Claim 1 wherein the controller is operative to change a parameter of the apparatus as the value of the natural variable changes.
- 15 3 A system for controlling apparatus as claimed in Claim 2 wherein the controller is operative to change said parameter proportionately as the value of the natural variable changes.
- 4 A system for controlling apparatus as claimed in Claim 2 or Claim 3 wherein said parameter is changed in direct relation to the value of the natural variable.
- 20 5 A system for controlling apparatus as claimed in Claim 2 or Claim 3 wherein said parameter is changed in inverse relation to the value of the natural variable.

- 7 -

6 A system for controlling apparatus as claimed in Claim 5 wherein the apparatus comprises one or more lamps of which said parameter is the light output thereof.

7 A system for controlling apparatus as claimed in Claim 6 wherein 5 the sensor comprises a photometer and the system is arranged to increase the light output from the lamps as incident light on the photometer decreases.

8 A system for controlling apparatus as claimed in Claim 6 or Claim 7 wherein the controller comprises an adjustable ballast.

9 A system for controlling apparatus as claimed in Claim 5 wherein 10 the natural variable is temperature.

10 A system for controlling apparatus as claimed in Claim 9 wherein the apparatus comprises one or more heaters of which said parameter is the heat output thereof.

11 A system for controlling apparatus as claimed in Claim 10 wherein 15 the sensor comprises a thermometer and the system is arranged to increase the heat output from the heaters as ambient temperature at the thermometer decreases.

12 A system for controlling apparatus as claimed in any of Claims 2 to 11 wherein said parameter is changed in a plurality of steps.

20 13 A system for controlling apparatus as claimed in any preceding claim wherein the control signal is a radio signal in the 868 MHz band.

- 8 -

14. A system for controlling apparatus substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

- 9 -


ABSTRACT**REMOTE CONTROL**

5 A hotel floor 110 comprises rooms 112 each provided with a central heating radiator 114 having a valve 114a adjustable by means of a 0-10V dc stepper motor 114b. In the hotel lobby 116 a sensor 122 for ambient temperature is connected to a radio transmitter 120 and radio receivers 114c are connected to the stepper motors 114b in each room 112. If the ambient temperature falls, the transmitter 120
10 transmits to the receivers 114c a signal representative of the lower temperature, and the stepper motors 114b open the valves 114a. If the temperature rises, the transmitter 120 transmits to the receivers 114c signals the higher temperature, and the stepper motors 114b close the valves 114a. Thus the heat output of the radiators 114 is varied in inverse relation to the ambient temperature. The system
15 may be adapted to control lighting fittings by way of dimming ballasts.

[Use Figure 1]


1/2

Fig 1

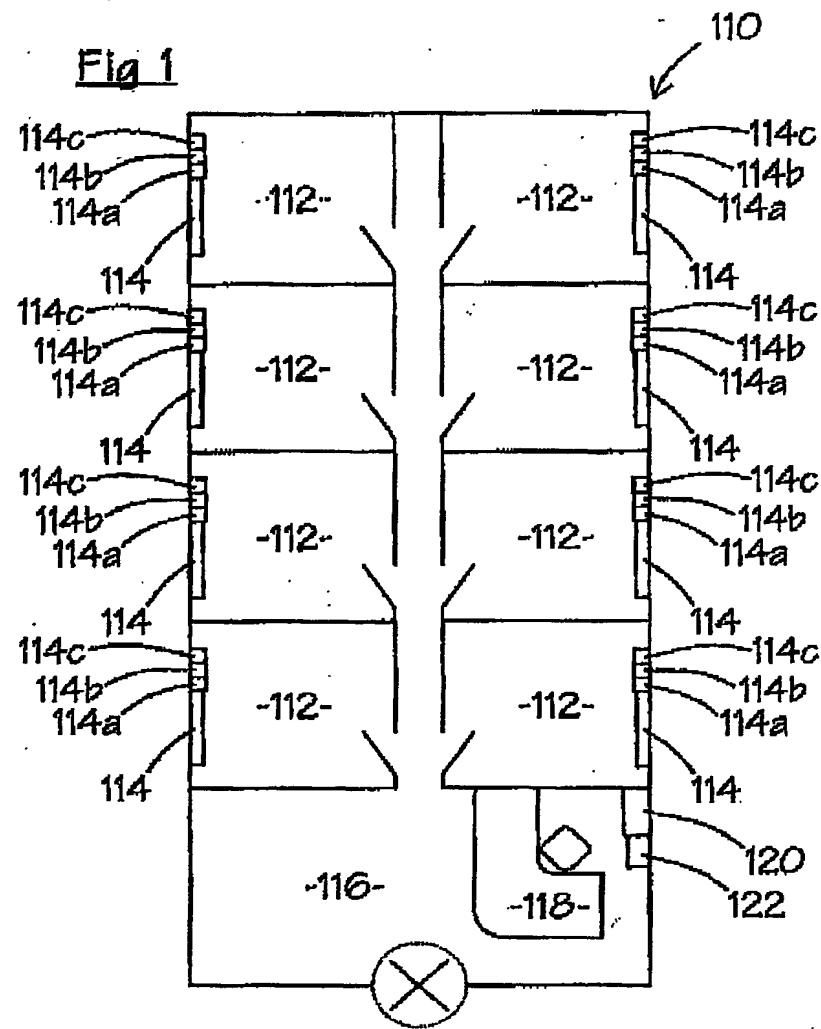


2/2

Fig 2

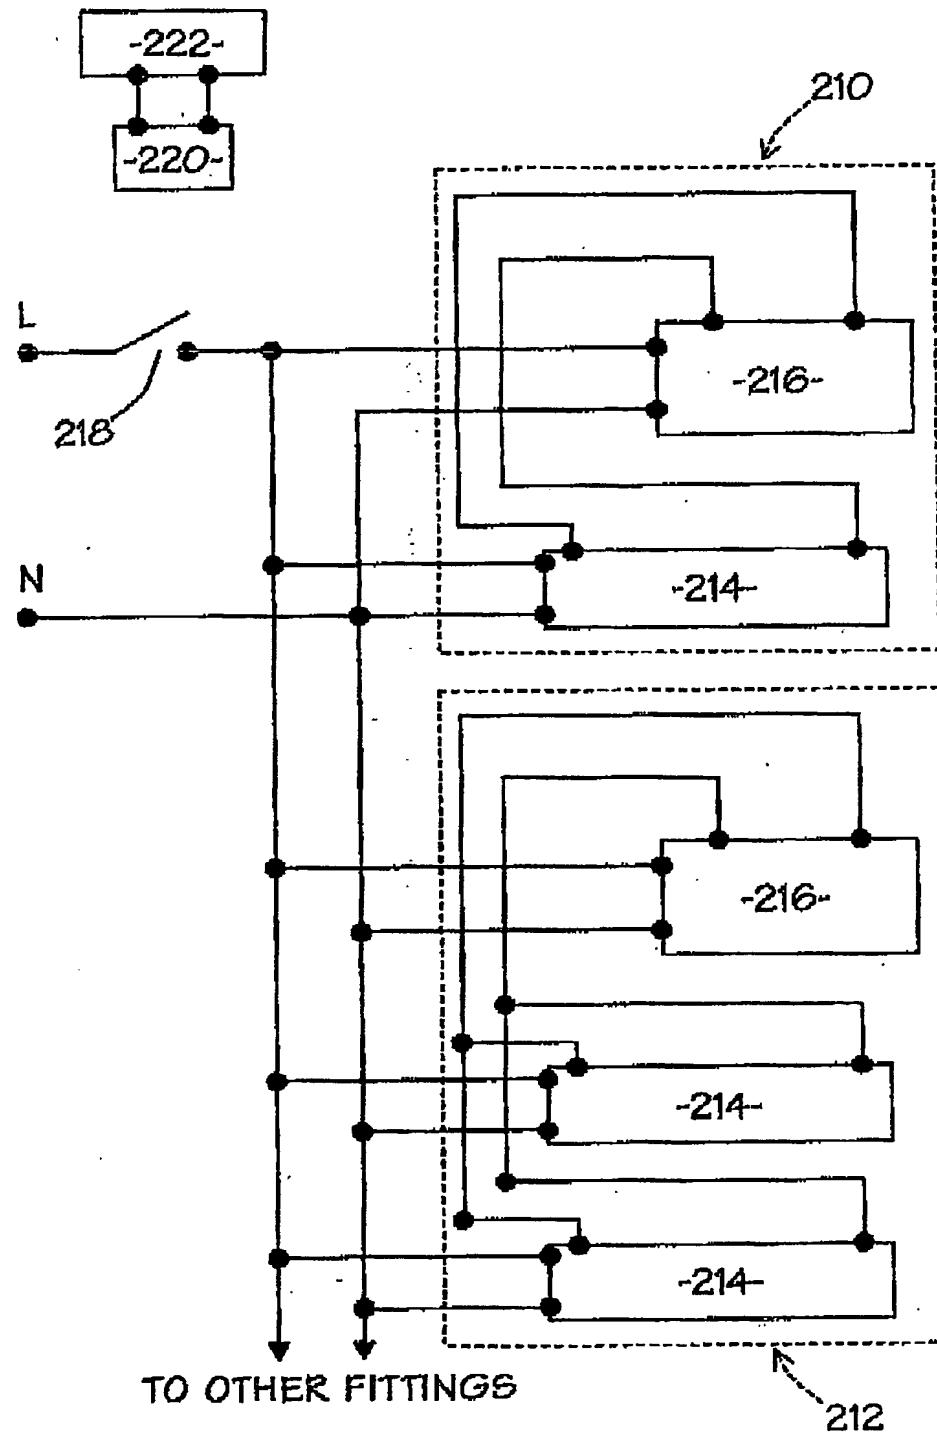

PCT/GB2004/003427



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.